
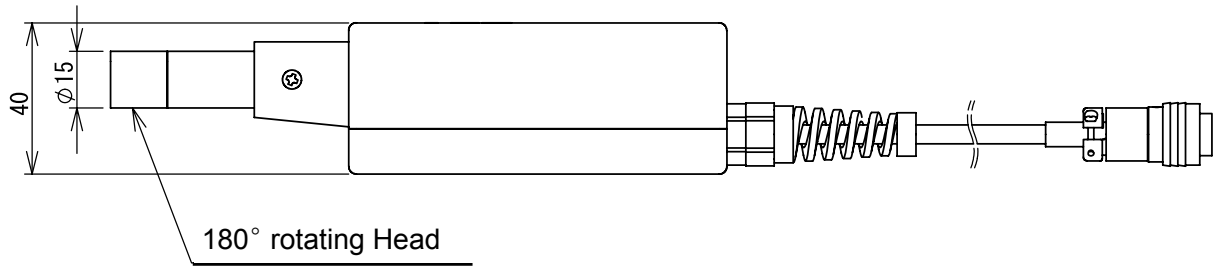


[ Dimension ]

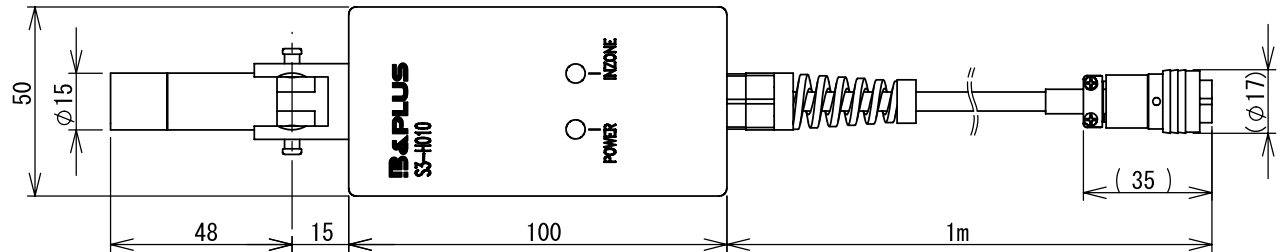

[ Specification ]

|                             |                                      |
|-----------------------------|--------------------------------------|
| Power supply                | 5V DC (Supplied by Handy controller) |
| Ambient temperature         | 0°C... +40°C                         |
| Ambient humidity            | 20... 80% (No condensation)          |
| Ambient atmosphere          | Without corrosive gas or heavy dust. |
| Storage temperature         | -10°C... +50°C                       |
| Falling test                | 30cm(Floor tile)                     |
| Cable                       | PVC, $\phi$ 5/4x0.25                 |
| Connector                   | Six sorts, Socket contact            |
| Weight                      | 220g                                 |
| Applicable Date carrier     | S1-D011-8K S1-D021-8K                |
| Applicable Handy controller | S6-U001                              |

|           |         |                  |            |      |            |               |
|-----------|---------|------------------|------------|------|------------|---------------|
| Type code | S3-H010 | Date             | 2013.01.22 | Rev. | Value date | Contents.     |
|           |         | No.              | D713108Ae  | A    | 2013.01.22 | New document. |
|           |         | 3RD ANGLE P.<br> | 1/1        |      |            |               |