


Type code: S4-C001



Identification System Processor for CC-Link interface

[Dimension]

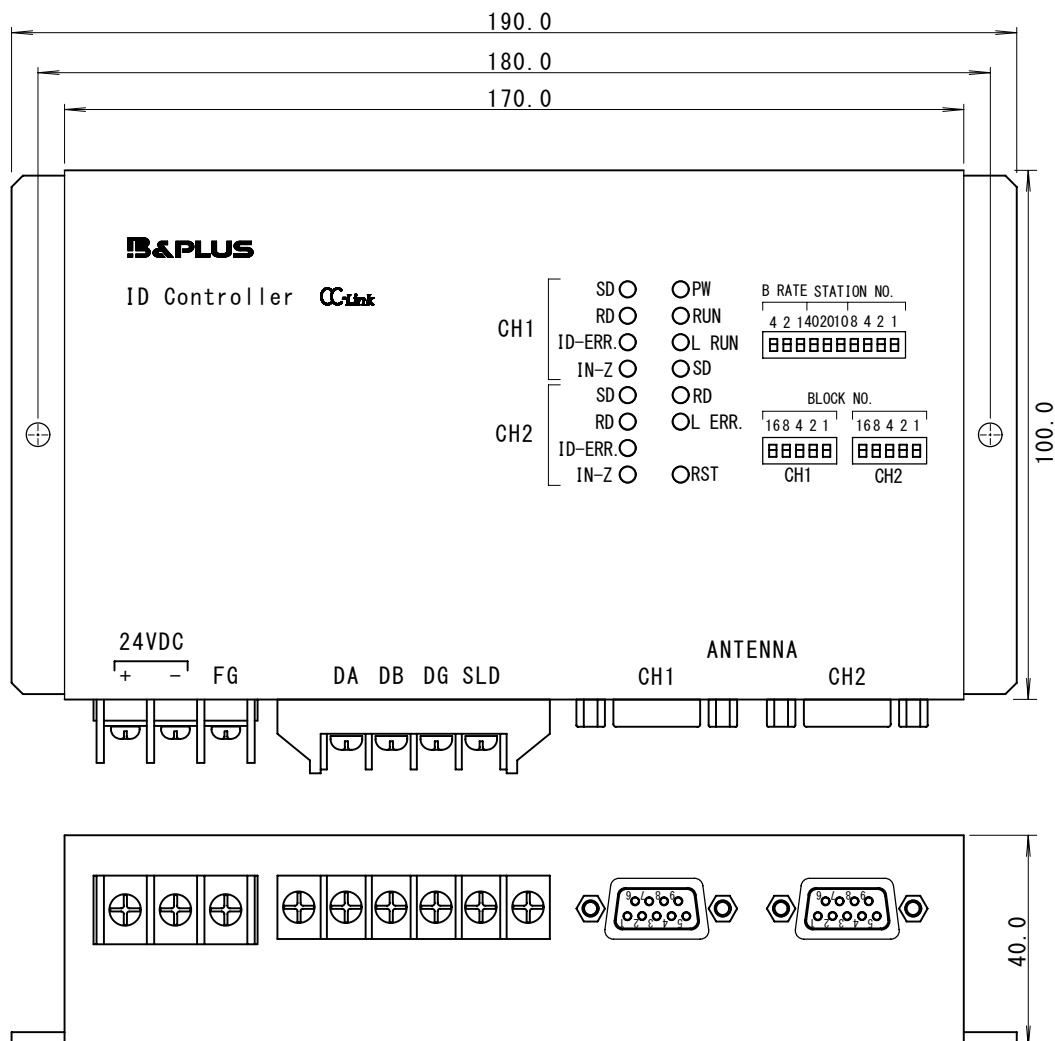

[Specification]

Power Supply	24VDC+/-10%(incl.ripple)
Current consumption	0.8A
Operating temperature	0...+55 deg.C.
Operating humidity	35...90%(without dew condensation)
Operating atmosphere	Without corrosive gas, heavy dust
Vibration rating	16.7Hz, amplitude 3mm, to each axis x-y-z for 30 min
Shock rating	10G 3 times to each axis x-y-z total 18 times

[Connectable Read/write Head]

S3-A0_ _series 1 or 2 heads.

Type code	S4-C001	Date	2013.01.21	Rev.	Value date	Contents.
		No.	D713107Ae	A	2013.01.21	New document.
		3RD ANGLE P.	1/1			